
Terminales con pies de montaje universal que se pueden instalar en el riel DIN NS 35.
Agujeros piloto de tornillo cerrado para garantizar una operación ideal de destornillador.
Para una pluralidad de nivel transversal de terminales equipados con accesorios unificados, como las placas finales, el separador de paquetes.
Distribución potencial a través de un puente fijo o terminales de acceso a la línea de inserción Terminales de cavidad central de la cavidad.
Todos los tipos de accesorios: cubierta final, tapón final, placa de partición, placa de separación, tira marcadora, puente fijo, puente de inserción, etc.

Parámetros técnicos

Model No.	JUSLKG 6N, Ground Modular Terminal Block
Color	Yellow/Green, other color can be customized
Length/Height/Wide (mm)	42.5/46/8.2
Connection method	Screw connection
Material	Flame resistant Nylon PA66, Nickel plated brass conductor
Rated Voltage/Current	800V/57A
Cross section, solid/soft Cable	0.2-10 mm^2 /0.2-6 mm^2
Conductor Size	24-8 AWG
Mounting Type	DIN Rail NS 35
Standard	IEC 60947-7-1
LOGO	WonkeDQ, LOGO can be customized
Packing Detail	24.90g/pc, 50PCS/BOX, 900PCS/CTN
Certification	CE/RoHS/CQC/ISO 9001

PRODUCT PARAMETERS

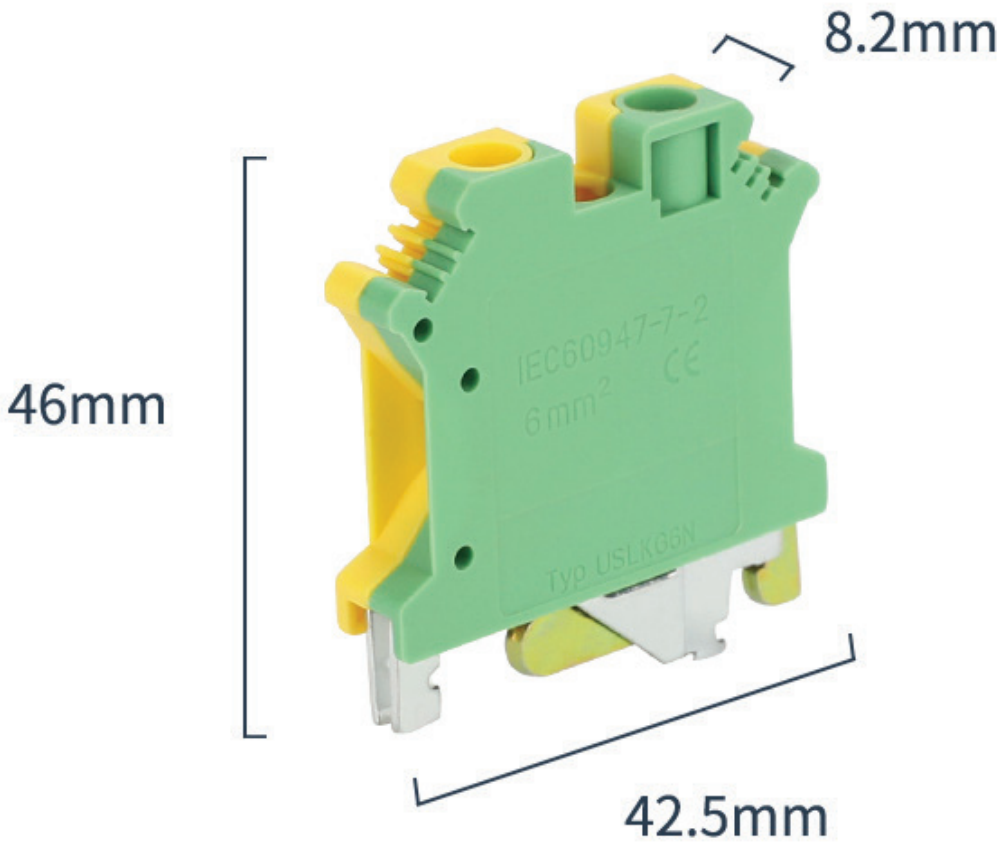

Model No.	USLKG6N	Cross section	0.2-6mm²
Colour	Yellow Green	Marker strip	ZB 8