
El bloque terminal de la serie de tornillos alberga un elemento de transporte de corriente (una tira de metal o barra terminal). También proporciona una base para el elemento de sujeción. La mayoría de los bloques terminales suelen ser modulares y montados en el riel DIN. Eso nos permite aumentar el número de terminales de acuerdo con los requisitos. Los bloques de terminales mantienen las conexiones mucho más seguras y los cables.

Model No.	JUK 5N
Color	Grey, Blue, other color can be customized
Length/Height/Wide (mm)	42.5/46.2/6.2
Connection method	Screw connection
Material	Flame resistant Nylon PA66, Nickel plated brass conductor
Rated Voltage/Current	800V/41A
Cross section, solid/soft Cable	0.2-6 mm^2 / 0.2-4 mm^2
Conductor Size	24-10 AWG
Mounting Type	DIN Rail NS 35
Standard	IEC 60947-7-1
LOGO	WonkeDQ, LOGO can be customized
Packing Detail	8.45g/pc, 50PCS/BOX,3000PCS/CTN
Certification	CE/RoHS/CQC/ISO 9001

PRODUCT PARAMETERS

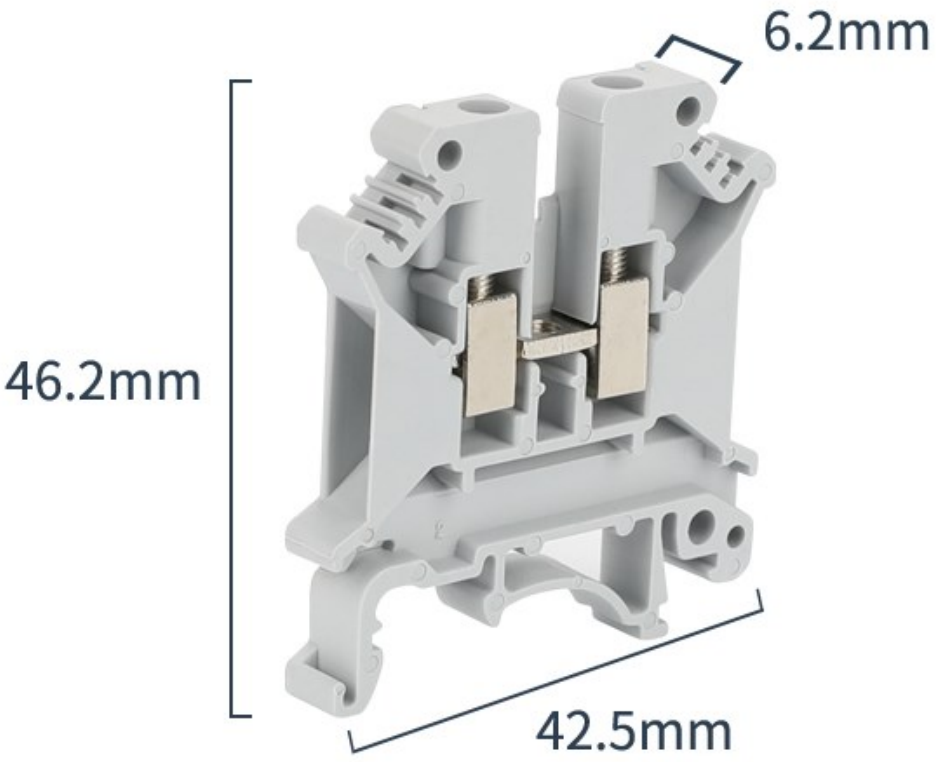

Model No.	UK-5N	Cross section	0.2-4mm²
Rated voltage	800V	Rated current	41A
End plate	D-UK 4/10	Fixed Bridge	FBI 10-6
Insertion Bridge	EB 10-6	Marker strip	ZB 6