
Eastron

NEW RE SERIES

Digital panel meter

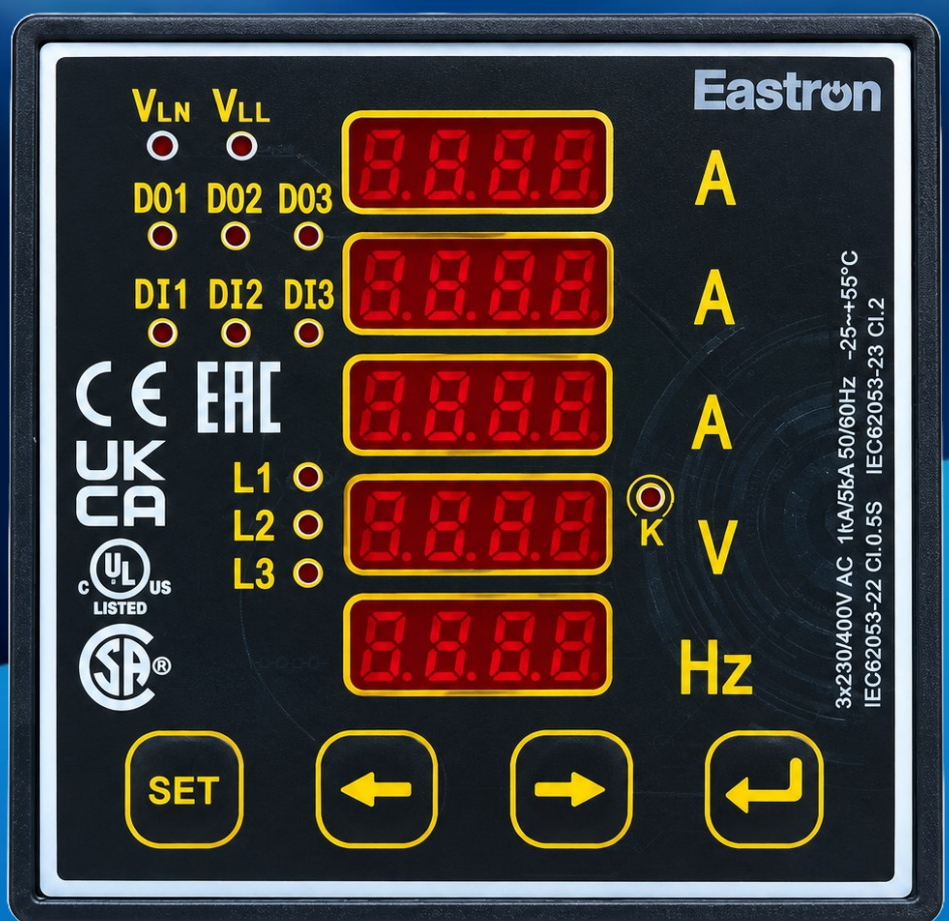

CE RoHS ISO 9001 CQC

Model and meaning

Eastron

RH - □ □ □ □ - □ □ □ □

(non)–Without Analog Output
nD–With Analog Outpur(n=1 output,2 output...)

(non)–Without RS485 Communication Function
nT–With RS 485 Communication(n=1 RS485,2 RS485)

(non)–Without Alarming(Switching)Output
nO–With Alarming(Swtiching)Output(n=1 output,2 output)

X - RE series

Display type:
1–Single Row; 2–Two Rows; 3–Three Rows
4–Four Rows; 5–Five Rows; 6–Six Rows
Y–LCD (non)–Whole LED Screen

Size Description:

Code	Corresponding Pointer Instrument Size	Panel Size(mm)	Hole Size(mm)
3	9 Square Type	96*96	91*91
6	61 Square Type	72*72	67*67

Measurement Description:
AA–AC Current, DA–DC Current, AV–AC Voltage
DV–DC Voltage, F–Frequency, H–Power Factor(cos)
P–Active Power, Q–Reactive Power, E–Active Energy
RE–Reactive Energy,U/I–Voltage and Current Combined
U/I/F–Voltage,Current and Frequency Combined

Phase Type:
(non)–single Phase, 3– Three Phase

Company Code

Función \ Modelo No.	Medida	Función	Pantalla	
	3A,3V,Hz	RS485	LED	LCD
CN-3UIF35X	√	1	√	-

Eastron

Simple Style

Aesthetic of industry

Show excellent quality


High quality


Damp-proof


New design



TRUE RMS



LED Display--- High Quality,Low Power Consuption, 3 Level Brightness Adjustment

"SET":To enter the selected menu or move to next digit

"←":Turn pages and menu or numeric increase.

"→":Turn pages and menu or numeric decrease.

"↵": Save the setting or Exit the Menu

Backside View



Convenient Wiring Terminals



Accessories to fasten the device

Laser Printing Wiring Diagram